



SELECT SERIES RV POWER PEDESTAL


MODEL NO.	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
SELRV 1	1	15A Duplex	1	15A Single Pole
SELRV 2	2	15A Duplex	2	15A Single Pole
SELRV 1D	3	15A Duplex	3	15A Single Pole
SELRV 2D	4	15A Duplex	4	15A Single Pole
SELRV 1G	1	15A GFI Duplex	1	15A Single Pole
SELRV 2G	2	15A GFI Duplex	2	15A Single Pole
SELRV 1DG	3	15A GFI Duplex	3	15A Single Pole
SELRV 2DG	4	15A GFI Duplex	4	15A Single Pole
SELRV 3	1	15A Duplex	1	15A Single Pole
	1	30A 125V RV	1	30A Single Pole
SELRV 3G	1	15A GFI Duplex	1	15A Single Pole
	1	30A 125V RV	1	30A Single Pole
SELRV 3-20	1	15/20A Duplex	1	20A Single Pole
	1	30A 125V RV	1	30A Single Pole
SELRV 3-20G	1	15/20A GFI Duplex	1	20A Single Pole
	1	30A 125V RV	1	30A Single Pole
SELRV 4	1	30A 125V RV	1	30A Single Pole
SELRV 5	1	20A 125V Twist Lock	1	20A Single Pole
SELRV 6	1	50A 125/250V	1	50A Two Pole
SELRV 7	2	30A 125V RV	2	30A Single Pole
SELRV 8	1	15A Duplex	1	15A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 8G	1	15A GFI Duplex	1	15A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 8-20	1	15/20A Duplex	1	20A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 8-20G	1	15/20A GFI Duplex	1	20A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 9	1	30A 125V RV	1	30A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 10	1	15A Duplex	1	15A Single Pole
	1	30A 125V RV	1	30A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 10G	1	15A GFI Duplex	1	15A Single Pole
	1	30A 125V RV	1	30A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 10-20	1	15/20A Duplex	1	20A Single Pole
	1	30A 125V RV	1	30A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 10-20G	1	15/20A GFI Duplex	1	20A Single Pole
	1	30A 125V RV	1	30A Single Pole
	1	50A 125/250V	1	50A Two Pole
SELRV 1M	1	15A Duplex	2	15A Single Pole
SELRV 2M	2	15A Duplex	4	15A Single Pole
SELRV 3M	1	15A Duplex	2	15A Single Pole
	1	30A 125V RV	1	30A Single Pole

FEATURES AND BENEFITS

- Mainly used in campgrounds and larger amperage applications
- Bolt together design
- Splitter bars allow single securing point or customized feed-thru capabilities
- Weatherproof lexan covers
- Top and bottom cross ties for increased rigidity
- Multiple base configurations with the direct burial being the standard
- Magnetic breakers enable branch rated protection
- Heavy duty construction
- ASA-61 grey industrial powder coat finish
- Feed-thru splitter blocks available
- Also available with cast aluminum covers
- Custom heights available
- Custom colours available

TECHNICAL INFORMATION

- CSA Type 3R enclosure (weatherproof)
- 28" Direct burial spade constructed of 14 ga. galvanized steel
- 30 1/2"H x 6"W x 5 3/4"D body constructed of 12 ga. galvaneal steel
- Standard qty. 3 B125 splitter blocks (#14 to 1/0 primary; #14 to #2 secondary)
- Grounding lug for 1/0 to #14 AWG wire
- 10KAIR branch rated breakers
- Bolted base






SELECT SERIES RV POWER PEDESTAL

CUSTOM PEDESTAL ORDERING
USE PART NUMBER:
SELRV-CXYYYYY-ZZZ


X=number or receptacles (4 max)
 Y=receptacle type
 Z=option group

RECEPTACLE TYPES (Y)		OPTION GROUP (Z)	
1	15A Duplex	HB	Hidden Base
A	15A TL	EB	External Base
2	15/20A Duplex		
B	20A TL		
3	30A RV		
C	30A TL		
5	50A		
G	15A GFI Duplex		
D	50A TL		
H	15/20A GFI		

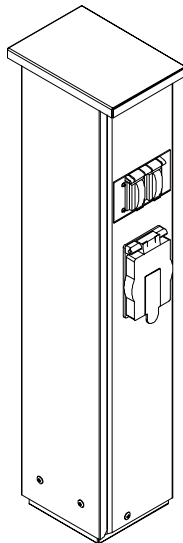


RECEPTACLE TYPES FOR SELECT SERIES PEDESTAL

1	15A, 125V (5-15R)	
A	15A TL, 125V (L5-15R)	
2	20A, 125V (5-20RA)	
B	20A TL, 125V (L5-20R)	
3	30A, 125V RV (WD6)	
C	30A TL, 125V (L5-30R)	
5	50A, 125/250V (14-50R)	
G	15A GFI, 125V (5-15R)	
D	50A TL 125/250V	
H	20A GFI, 125V (5-20RA)	

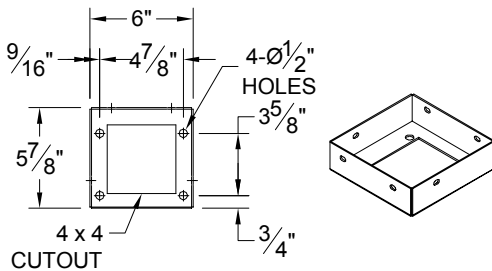

HIDDEN BASE

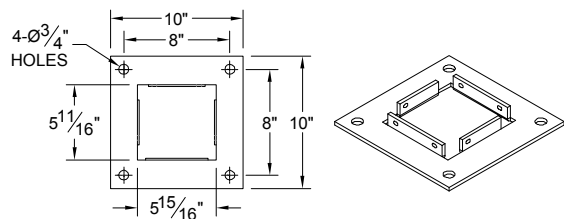

EXTERNAL BASE