




SERIES 3 MB POWER PEDESTAL

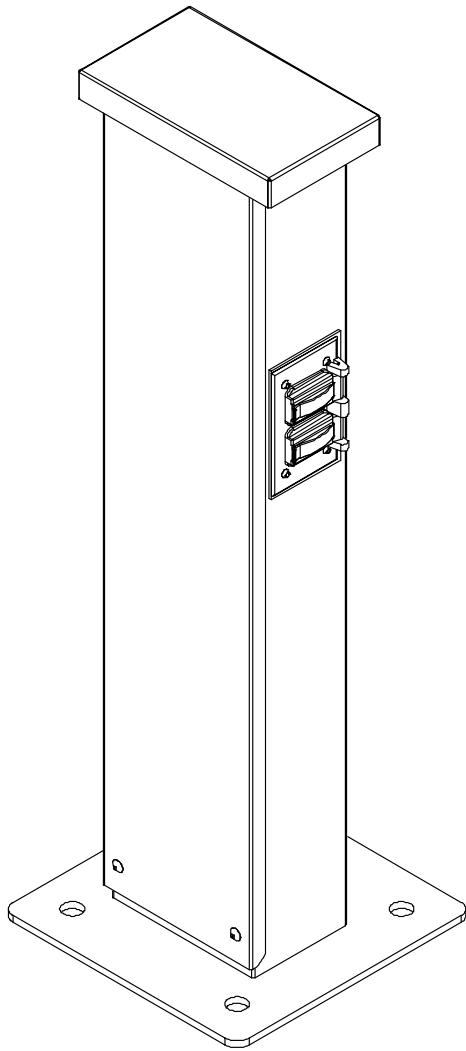


FEATURES AND BENEFITS

- Mainly used for parking lot applications where 120V/15A is required
- More robust than standard parking lot design
- Splitter bars allow single securing point and feed-thru capabilities
- Magnetic breakers enable branch rated protection
- Fully secured using anchor bolts set in concrete base
- Heavy duty construction
- Weatherproof lexan covers
- ASA-61 grey industrial powder coat finish
- Also available with 15/20A or GFI receptacles
- Also available with cast aluminum covers
- Feed-thru splitter blocks available
- Custom heights available
- Custom colours available

TECHNICAL INFORMATION

- CSA Type 3R enclosure (weatherproof)
- 10" x 10" baseplate constructed of 1/4" THK mild steel
- 30 1/2"H x 6"W x 4"D body constructed of 12 ga. mild steel
- 14 1/4"H x 5 3/4"W backpan constructed of 14 ga. mild steel
- Standard qty. 3 B125 splitter blocks (#14 to 1/0 primary; #14 to #2 secondary)
- Grounding lug for 1/0 - #14 AWG wire
- 10KAIR branch rated breakers
- Fully welded base

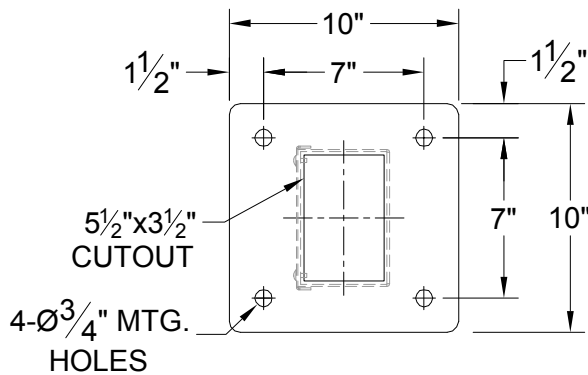

BASEPLATE DETAIL

MODEL NO.	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
S3MB-AP1	2	15A Duplex	4	15A Single Pole
S3MB-AP1M	2	15A Duplex	2	15A Single Pole
S3MB-AP2	1	15A Duplex	2	15A Single Pole
S3MB-AP2M	1	15A Duplex	1	15A Single Pole
S3MB-AP3	2	15A Duplex	0	None
S3MB-AP4	1	15A Duplex	0	None
S3MB-AP5	3	15A Duplex	0	None
S3MB-AP6	4	15A Duplex	0	None
S3MB-AP7	3	15A Duplex	3	15A Single Pole
S3MB-AP8	4	15A Duplex	4	15A Single Pole

ACE MANUFACTURING METALS LTD

Toll Free (866) 352-7145 · Direct (780) 352-7145 · BC Direct (250) 808-9116

www.acemfg.com · info@acemfg.com · Fax (780) 352-7147